


## **Box Connections 18A & 19A**

Modular Box Connections consist of a box connection 18A or 19A, up to 20 External Connection Modules 1A or 1B (ECM 1s), External Protector Modules 1A (EPM 1A), and if high voltage protection is required External Protector Modules 2A (EPM 2A).

The BC 18A is a vented enclosure capable of accepting up to 20 modules, 4 incoming cables, an earth connection and 20 dropwires. The single pair modules can be fitted on to either of two metal rails permanently mounted in the box. Provision is made for dropwire and cable management. The box is fitted with enhanced security features which can be utilised if required.

The BC 19A is a vented enclosure capable of accepting up to 10 modules, 2 incoming cables, an earth connection and 10 dropwires. The single pair modules can be fitted on to either of two metal rails permanently mounted in the box. Provision is made for dropwire and cable management. The box is fitted with enhanced security features which can be utilised if required.

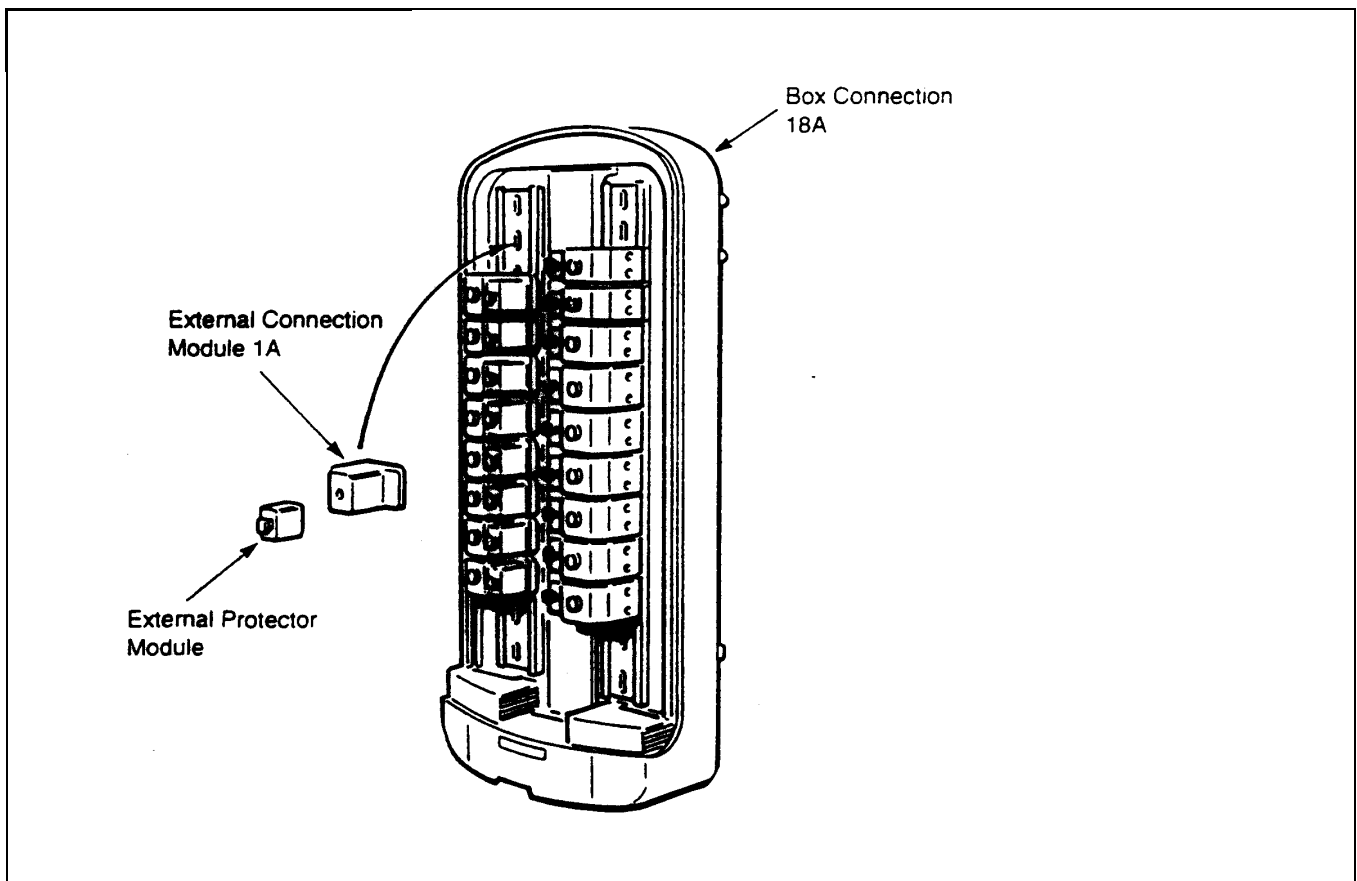

The BC18 should be the first choice for all new work and for replacement of obsolescent BTs when carrying out plant uplift programmes.

Where the distribution point is located on a customers premises and less than 10 serving pairs will be required a BC 19A can be fitted.

A BC 19A can also be fitted as the second DP on a pole where less than 10 dropwires are to be terminated and space is restricted i.e., shared poles